



Celloger[®] **Series** Automated live cell imaging system

Celloger[®] Nano I Celloger[®] Mini Plus I Celloger[®] Pro I Celloger[®] Stack



Capture the moments of dynamic cellular processes, improving your research with comprehensive insights

Celloger[®] Line-up



Celloger® Pro

The Celloger® Pro is **the most advanced and latest product** in the Celloger® series. Providing researchers with **state-of-the-art functionalities**, it offers unmatched convenience and **exceptional image quality**, enhancing and expanding the scope of experiments.



Celloger[®] Mini Plus

The Celloger[®] Mini Plus is a **fundamental system** for live cell imaging. By offering essential and user-friendly tools for analyzing live cells, it **serves as a basic system** for researching dynamic cellular events, **representing a model** within the Celloger[®] series.



Celloger® Nano

The Celloger® Nano is the most compact and economical system among the Celloger® series. It can wirelessly connect to a tablet or laptop, enabling users to observe and analyze cells from anywhere. With its manual stage compatible with any vessels, it makes it easy to quickly check the state of cells.



Celloger® Stack

GOOD DESIGN AWARD 2021

Celloger[®] Stack is an automated **multi-layer vessel monitoring** device, a useful system for **large-scale cell cultures**. By utilizing **the alarm system** to notify users when the optimal confluency level has been reached, it enables easy harvesting of cells at the appropriate times.















Key Features of Celloger®

Pro Mini Plus Nano Stack



Real-time cell monitoring inside an incubator

The Celloger® series is designed for efficiently monitoring cells in real-time without disturbing cell-growth conditions. By simply placing the devices within the incubator and connecting them to an external PC, researchers can remotely observe cells in real time.



Compatible with different vessel types

To accommodate for a wide range of experiments, different cell culture vessels such as well plates (up to 96 wells), flasks, dishes, and slides can be used by simply replacing the vessel holders for specific needs. *Celloger® Stack is used for multi-layer vessel types.



Time-lapse imaging capability

Using the time-lapse function, cell images are captured automatically according to the schedule set by the researcher and the images are easily converted into time-lapse videos.



User-friendly functions included in the software package

The Scanning and Analysis software are included as standard packages, allowing users to create unlimited copies of both software. Researchers can easily set multiple image capture modes and generate productive experimental data using a range of analysis tools available in these software.





Viser-interchangeable objective lens



Wireless connection







V Efficient image-processing method



V Dual color fluorescence (green and red)

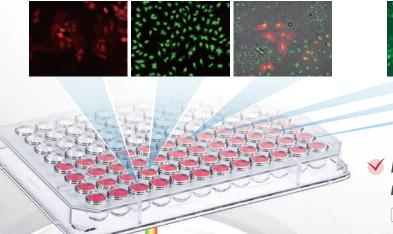


Single color fluorescence (green or red)




 High-quality images from multiple positions (camera moving type)
(Pro) (Mini Plus) (Stack)

Key Applications of Celloger®




NIH3T3

Cell proliferation Taken from Celloger[®] Nano (10X, Green FL)




Wound healing assay Taken from Celloger[®] Pro (2X)



HEK293-GFP


Spheroid cell death assay Taken from Celloger® Pro

(2X)




HeLa

Actin dynamics assay Taken from Celloger[®] Pro (10X)



NIH3T3 & MCF-7


Co-culture monitoring Taken from Celloger[®] Nano (4X, Green FL)



HeLa


Mitochondrial membrane potential

Taken from Celloger® Pro (2X)




HeLa

ROS detection Taken from Celloger® Nano (4X, Green FL)



Raw 264.7

Phagocytosis monitoring Taken from Celloger® Mini Plus (10X, Green FL)



Zebrafish

Zebrafish observation Taken from Celloger® Mini Plus (4X, Green FL) *using Z-stacking and stitching functions





Find out more applications and time-lapse videos of Celloger® series

CURIOSIS

Specification







		Celloger® Nano	Celloger® Mini Plus	Celloger [®] Pro	Celloger [®] Stack
Dimension (H x W x L)		211 × 146 × 188 mm	226 × 358 × 215 mm	250 × 338 × 412 mm	350 × 330 × 450 mm
Weight		3.2 kg	5.6 kg	9.6 kg	15 kg
Imaging modes		Bright-field, Green or Red fluorescence		Bright-field, Green and Red fluorescence	Bright-field
Magnification		2X/4X/10X		2X, 4X, 10X (User interchangeable)	2X
Fluorescence	Green	Ex:470/40 Em:510lp		Ex:470/40 Em:540/50	-
	Red	Ex:525/30 Em:570lp		Ex:562/40 Em:641/75	-
Field of view	2Х	2.53 × 1.90 mm		2.02 × 1.49 mm	2.53 × 1.90 mm
	4X	1.19 × 0.90 mm		1.41 × 1.05 mm	-
	10X	0.57 × 0.43 mm		0.70 × 0.52 mm	-
Imaging positions		Single Multiple			
Focusing		Manual & Auto			
Culture vessels		Slide, Dish, Flask, Well plate (up to 96-well)			Multi-layer chamber (up to 10 layers)
Operating environment		10-40°C temperature, 20-95% humidity			
File export format		TIFF, AVI, CSV (JPEG, PNG)			
O/S required		Windows 10 and above			
Image processing methods	Time-lapse	٠	•	•	•
	Real-time recording	٠	•	•	٠
	Cell confluency	•	•	•	٠
	Stitching		•	•	
	Z-stacking	•	•	•	
	Dual screen analysis			•	
	Cell counting (FL)			•	

🕈 Homepage



Distributed in Europe by World Precision Instruments | www.wpi-europe.com

UK Office I +44 1462 424700 I wpiuk@wpi-europe.com

German Office I +49 6031 67708-0 | wpide@wpi-europe.com

FOR RESEARCH USE ONLY and not for use in diagnostic procedures. Specifications subject to change without notice.